


"QUALITY PUMPS SINCE 1939"

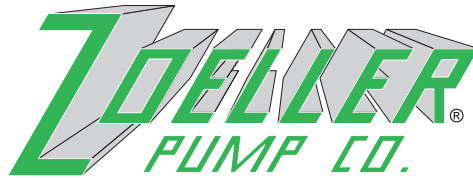

SECTION: 2.10.020
FM0944
0803
Supersedes
0303

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
<http://www.zoeller.com>

COMPARE THESE FEATURES:

- Use fully or partially submerged.
- Durable polypropylene housing.
- 3-prong power cord, 9 ft. or 20 ft.
- 115 Volt/Single Phase/60 Hz.
- High quality sealed motor.
- Thermal-overload protected motor.
- Model 42 is adaptable for use with standard garden hose (fitting included), 1" NPT pipe, or 1/4" slip fit (use discharge hose kit P/N 1010-0117).
- Model 44 is adaptable for use with standard garden hose (fitting included), 1-1/4" Female NPT or 3/4" female NPT adapter.
- Model 46 is 2" NPT discharge with 2" hose adapter.
- Screened bottom may be removed to allow easy cleaning.
- Use indoors or outdoors.
- Typical applications: dewatering and filling.
- Oil free.
- Models 42 and 44 remove water from any flat surface down to 1/8"; model 46 will pump down to 1".
- Lightweight and Portable.
- Compact design: Models 42 and 44 will fit in a 7" opening; model 46 will fit in an 8" opening.
- One-year limited warranty.
- Temperature rating 120°F.
- Nonautomatic.

Model	HP	Amps	Max Width	Max Height	Weight
42	1/6	1.5	6	11-3/4	7.3 lbs.
44	1/4	2.5	6	11-3/4	7.7 lbs.
46	1/2	6.0	8	14-1/2	16 lbs.

TOTAL DYNAMIC HEAD FLOW PER HOUR

MODEL		42		44		46	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	900	3407	1800	6813	3600	13630
10	3.0	660	2498	1320	4996	3300	12490
15	4.6	360	1363	720	2725	2700	10220
20	6.1	---	---	---	---	1860	7040
30	9.1	---	---	---	---	360	1360
Shut-off Head		19 ft. (5.8 m)		20 ft. (6.1 m)		33 ft. (10.1 m)	

MODEL 42 - 44 - 46

FLOOR SUCKER SERIES

UTILITY PUMPS



**1/6 HP
Model 42**



**1/4 HP
Model 44**



**1/2 HP
Model 46**



**SSPMA
MEMBER**
SUMP AND SEWAGE
PUMP MFRS. ASSN.

**USE FLOOR SUCKER SUBMERGED OR ON ANY
FLAT SURFACE TO PUMP CLEAR WATER.**

CSA US
Tested to UL
Standard UL778 &
Certified to CSA
Standard C22.2 No.108