

HYDROMATIC®

P33A1

Pedestal Sump Pump

- Basement Sump Draining
- Industrial Circulators
- Transfer Tanks
- Dependable 1/3 HP motor pumps up to 40 GPM at 10' total dynamic head. Discharge is 1-1/4" N.P.T.
- Easily adjustable pumping range.
- Non-corrosive volute/base and impeller.
- Automatic reset thermal overload protection.



P33A1 - Pedestal Sump Pump

Details


Pump Characteristics

Pump/Motor Unit	Upright
Pump Models	P33A1
Horsepower	1/3
Full Load Amps	5.7
Motor Type	Split Phase
R.P.M.	1625
Phase Ø	1
Voltage	115
Hertz	60
Operation	Intermittent
Temperature	140° F Ambient
NEMA Design	A
Insulation	Class B
Discharge Size	1-1/4" NPT
Solids Handling	1/8"
Unit Weight	11 lbs.
Power Cord	16/3, SJT, 8'


Materials of Construction

Pump Casing	Thermoplastic
Shaft	Thermoplastic
Impeller	Thermoplastic
Bearing	Barthane
Base	Thermoplastic
Fasteners	Stainless Steel
Float	Plastic

Performance Data

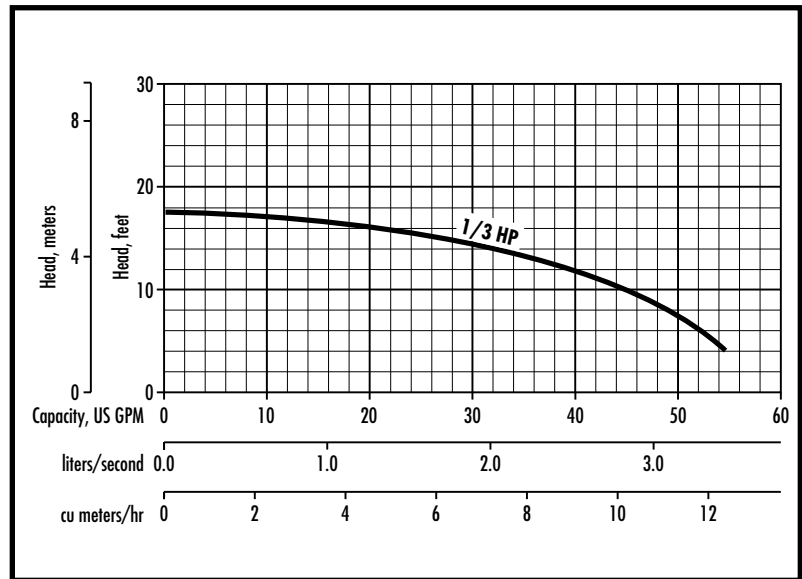

Dimensional Data

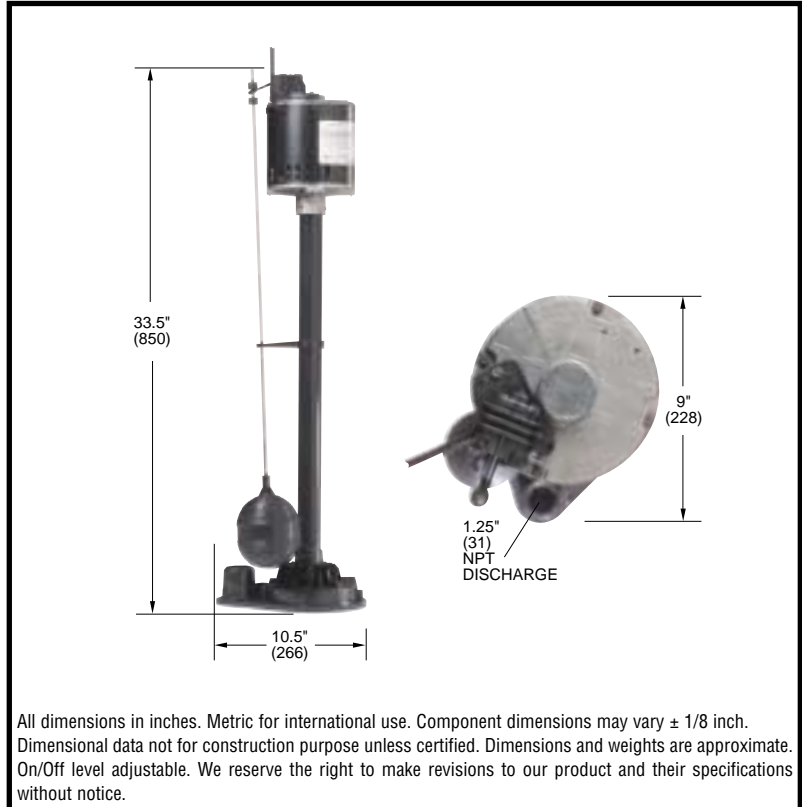

Pentair Pump Group

1840 Baney Road Ashland, Ohio 44805
 Tel: 419-289-3042 Fax: 419-281-4087
 www.hydromatic.com ISO 9001 Certified

© 1999 Hydromatic®, Ashland, Ohio. All Rights Reserved.

- Your Authorized Local Distributor -