

HYDROMATIC®

W/D/V-A1

Submersible Sump Pump

- Basement Sumps
- Septic Tank Effluent
- Industrial Circulators
- Transfer Tanks



Automatic operation features wide-angle float switch (W-A1), or Hydromatic's exclusive pressure diaphragm switch (D-A1) or Hydromatic's vertical, mechanical float switch (V-A1). All switches feature a piggyback plug-in arrangement that allows for simple conversion to manual operation.

Cast iron body and an oil-filled motor provide superior cooling characteristics for longer pump life. Motor windings contain automatic thermal overload protection.

Energy efficient .3 HP motor pumps up to 38 GPM at 10' total dynamic head. Discharge is 1-1/2" N.P.T.



May be operated manually or automatically with a piggyback switch.



D-A1 Model



V-A1 Model

W-A1 Model


W/D/V-A1 - Submersible Sump Pump

Details


Pump Characteristics

Pump/Motor Unit	Submersible
Automatic Models	W-A1, D-A1 & V-A1
Horsepower	.3
Full Load Amps	8.0
Motor Type	Shaded Pole (4 pole)
R.P.M.	1550
Phase Ø	1
Voltage	115
Hertz	60
Temperature	120°F Ambient
NEMA Design	A
Insulation	Class A
Discharge Size	1-1/2" NPT (38mm)
Solids Handling	1/2" (13mm)
Unit Weight	23 lbs.
Power Cord	18/3, SJTW, 10' std. (20' optional)

Performance Data

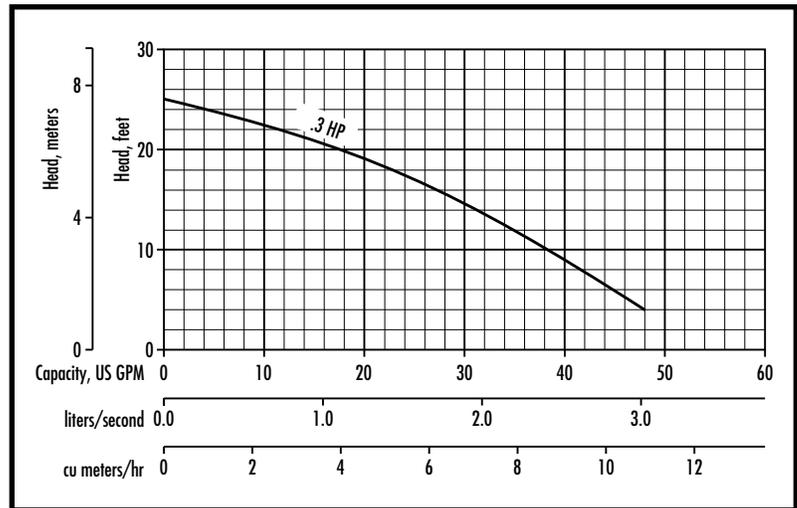


Dimensional Data

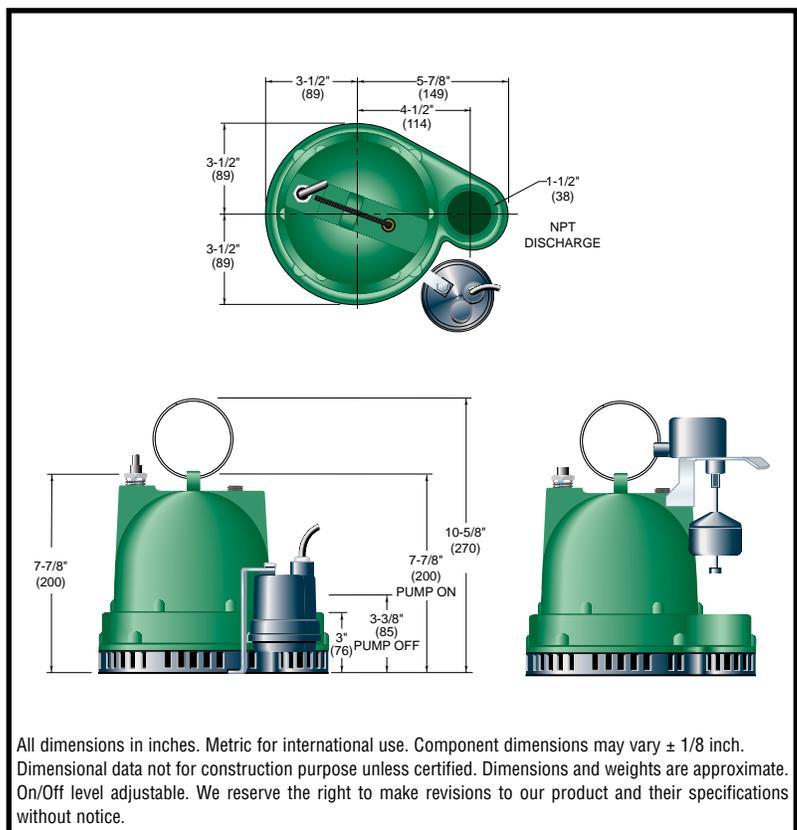

Materials of Construction

Handle	Stainless Steel
Lubricating Oil	Dielectric Oil
Motor Housing	Cast Iron
Shaft	Steel
Mechanical Shaft Seal	Seal Faces: Carbon/Ceramic Seal Body: Anodized Steel Spring: Stainless Steel Bellows: Buna-N
Impeller	Thermoplastic
Upper Bearing	Cast Iron Sleeve
Lower Bearing	Ball Bearing
Strainer/Base	Plastic
Fasteners	Stainless Steel



USA

1840 Baney Road Ashland, Ohio 44805
Tel: 419-289-3042 Fax: 419-281-4087

www.hydromatic.com
ISO 9001 Registered Quality System

— Your Authorized Local Distributor —

CANADA

269 Trillium Drive Kitchener, Ontario, Canada N2G 4W5
Tel: 519-896-2163 Fax: 519-896-6337