

Liberty Pumps™

LE50-SERIES SEWAGE PUMPS

**2" Solids-Handling
1/2 hp**

**112 GPM at 10' TDH
25' Maximum Head**



MODELS:

LE51M 115V, 12a, Manual

LE51A 115V, 12a, Automatic

LE52M 208-230V, 6.8a, Manual

LE52A 208-230V, 6.8a, Automatic

Automatic models feature a mercury-free wide-angle float with series plug—allows for manual operation of pump separate from switch.

FEATURES:

- Heavy cast iron construction
- Oil filled, thermally protected motor
- Permanently lubricated bearings
- 2-vane, corrosion resistant *HYTREL® impeller
- All stainless steel fasteners and rotor shaft
- Quick-disconnect power cord allows replacement of cord in seconds without breaking seals to motor
- Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional)

*HYTREL® is a registered trademark of DuPont Polymers

LE50-SERIES

TECHNICAL SPECIFICATIONS

PUMP

The pump(s) shall be model _____ as manufactured by Liberty Pumps, Bergen, NY, or equal.

The pump(s) shall have a capacity of ____ GPM at a total dynamic head of ____ feet.

Motor size shall be 1/2 horsepower, single phase, 60 hz. and ____ volt operation.

MOTOR

The pump motor shall be of the submersible type, oil filled, hermetically sealed and shall be thermally protected. The overload element shall automatically reset when motor cools. Motor windings shall be of the class B insulation rating. The rotor shaft shall be made of 416 stainless steel and shall be supported by lower and upper sleeve bearings.

The power cord shall be of the quick-disconnect design allowing replacement of the cord without breaking seals to the motor and/or oil chamber.

IMPELLER

The pump shall have a 2-vane semi-open impeller capable of passing a 2" spherical solid.

SEAL

The shaft seal shall be of the carbon/ceramic unitized design, with BUNA N elastomers and stainless housings.

EXTERNAL CONSTRUCTION

The pump volute, legs and motor housing shall be gray iron castings, class 25 or better. All fasteners shall be of 300-series stainless steel or brass. All castings shall be epoxy powder coated before assembly.

LEVEL CONTROL

Automatic units shall be controlled by an adjustable, mercury-free, wide angle float switch. Float cord shall be equipped with a series plug for manual bypass operation.

MODELS	HP	VOLTS	PHASE	AMPS	DISCHARGE	AUTOMATIC	IMPELLER
LE51M	1/2	115	1	12	2" FNPT	NO	2-VANE SEMI-OPEN
LE51A	1/2	115	1	12	2" FNPT	YES	2-VANE SEMI-OPEN
LE52M	1/2	230	1	6.8	2" FNPT	NO	2-VANE SEMI-OPEN
LE52A	1/2	230	1	6.8	2" FNPT	YES	2-VANE SEMI OPEN

10' cord standard on above models. For 25' cord options, add a "-2" suffix to model number.
Example: LE51A-2 for Model LE51A with 25' cord.

DIMENSIONAL DATA:


Weight: LE51M: 42 LBS.

Height: 14"

Major Width: 11.5" (manual models)

Maximum fluid temperature 140° F.

PERFORMANCE CURVE

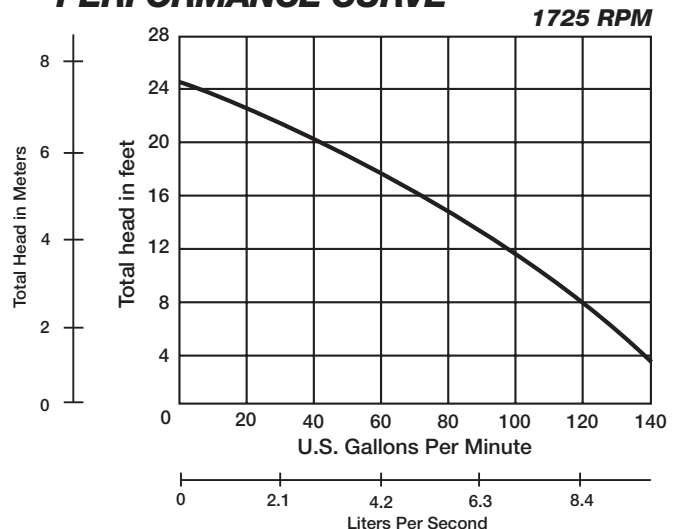

Specifications subject to change without notice.

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416 • Phone 800-543-2550 Fax (585) 494-1839

www.libertypumps.com

Copyright © Liberty Pumps, Inc. 2004
All rights reserved. LLIT 1500 R5/04