

Liberty Pumps™

MODEL 247 VMF

Liberty's unique one-piece cast iron "Uni-Body"



Mid-mount, peripheral-port inlets eliminate bottom suction

240-SERIES SUBMERSIBLE SUMP PUMPS

1-1/2" Discharge
1/4 hp

The most advanced
1/4 hp pump available!



MODEL 241



MODELS:

240 Manual

241 Wide-Angle Float, Quick-Disconnect

243 Wide-Angle Float, Series Plug
247 VMF, Vertical Magnetic Float

Wide-Angle Floats are mercury-free, mechanically activated.

FEATURES:

- Unique one-piece cast iron housing
- Peripheral port inlets eliminate bottom suction
- 304 stainless steel intake plate
- Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional)
- Available in three switch styles including Liberty's VMF switch (U.S. Patent # 5324171)

240-SERIES

A 1/4 hp Sump Pump for Professionals!

ALL MODELS FEATURE:

- Rugged 1/4 hp motor, oil filled with thermal overload protection
- 1/4" solids handling
- 1-1/2" discharge
- Hermetically sealed motor and switch cavities, and permanently lubricated bearings
- Liberty's UNI-BODY casting – a solid, one-piece housing that eliminates the lower motor seal ring found on other pumps
- Integral, mid-mounted "peripheral-port" inlets – eliminate bottom suction of debris and foreign material
- Stainless steel volute intake plate, internally mounted. Will not corrode
- 5 vane, glass reinforced thermoplastic impeller. Non-clog design
- Quick-disconnect 10' standard power cord allows replacement of cord in seconds without breaking seals to motor. (25' length optional) For 25' cord option, add a "-2" suffix to model number. Example: 247-2 for Model 247 with 25" cord.
- Fasteners – all non-corrosive stainless steel
- Stainless steel rotor shaft

2 YEAR LIMITED WARRANTY

MOTOR SPECIFICATIONS:

1/4 hp 115V 9.2 amps 60Hz 3400 RPM
Thermally Protected & Permanently Lubricated



DIMENSIONAL DATA:

Weight: 21 LBS.


Height: 10"

Major Width: 9.0" (manual model 240)


PERFORMANCE CURVE

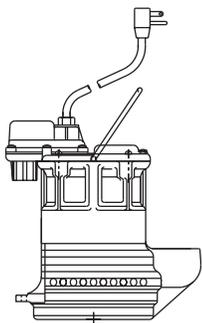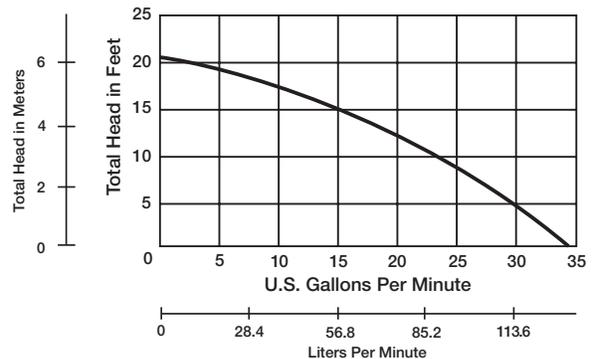


240-Series
Manual, no switch.

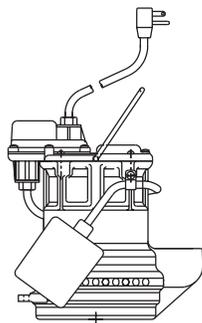

241-Series
Quick-disconnect wide-angle float, mercury-free.

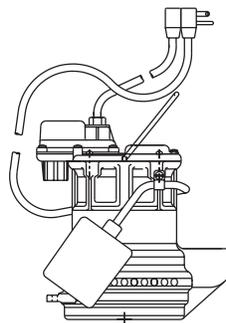

243-Series
Wide-angle float with series (piggy-back) plug, allows manual operation of pump.

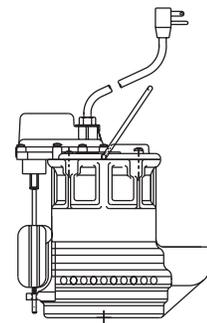

247 VMF-Series
(U.S. Patent #5324171) VMF switch, magnetically operated vertical float – operates in a 10" diameter sump.



Specifications subject to change without notice.

Liberty Pumps • 7000 Apple Tree Avenue • Bergen, New York 14416 • Phone 800-543-2550 Fax (585) 494-1839

www.libertypumps.com

Copyright © Liberty Pumps, Inc. 2003
All rights reserved. LLIT400-R05/04